


Residential Grade SR2 Series

Body Style 2

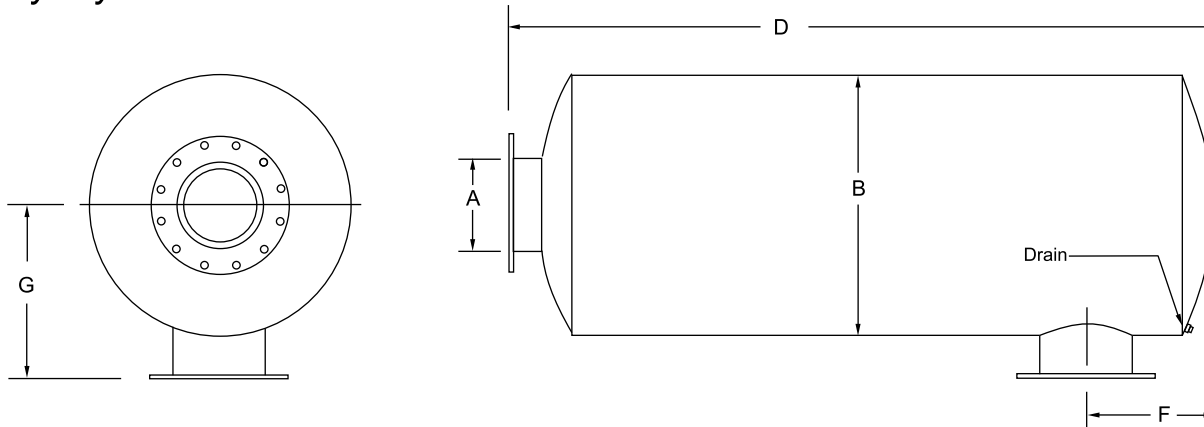

Applications


- The SR2 series is for use where moderate silencing is required
- A wide range of brackets are available to meet your installation needs
- Can be mounted in any position
- Average noise level reductions: 18-25 dBA

Construction

- Carbon steel construction is standard however other materials such as stainless steel and aluminized steel are available
- Painted with high temperature black paint
- Dual inlets as well as other inlet and outlet configurations are available
- Standard connections are ANSI flanges
- Smaller and larger sizes are available upon request

Model	A	B	D	F (min)	G	WT
SR2-04-0001	4	10	43	5	9	50
SR2-05-0001	5	10	51	6	9	60
SR2-06-0001	6	12	51	6	10	75
SR2-08-0001	8	18	57	9	13	150
SR2-10-0001	10	22	72	10	15	220
SR2-12-0001	12	26	72	12	17	330
SR2-14-0001	14	30	97	13	19	600
SR2-16-0001	16	36	111	15	22	900
SR2-18-0001	18	36	123	16	22	1200
SR2-20-0001	20	42	136	18	25	1400

Representative Attenuation Curve, SR2 Series

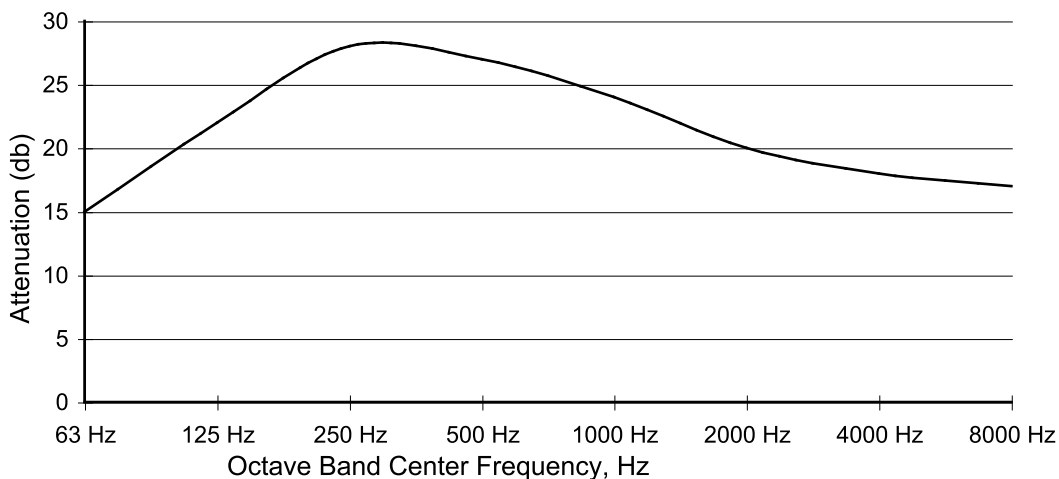

Customize your exhaust system to meet your application needs!

We will work with you to design the silencer and exhaust components that will save product cost and installation time.

BMES-101 (10/08)

BelMar Industries

Ph: 952-486-8588

Fax: 952-486-8289

www.belmar-ind.com