


Spark Arrestor Silencers

Critical Grade AC2 Series

Body Style 2

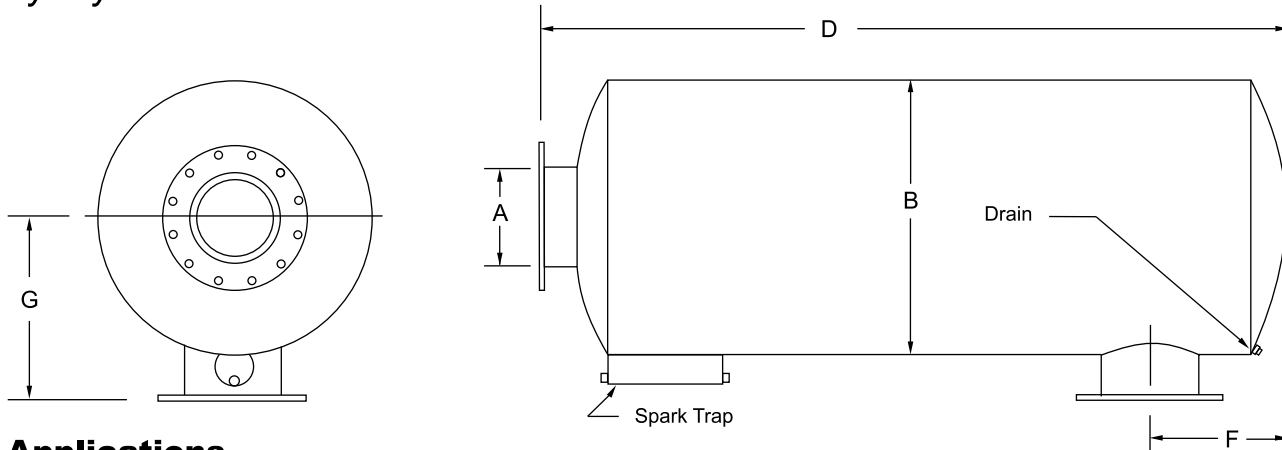

Applications


- The AC2 series spark arrestor should be used in areas where a fire hazard exists
- Intended for use where ambient noise levels are low and a high degree of silencing is required
- A wide range of brackets are available to meet your installation needs
- Can be mounted in any position
- Average noise level reductions: 24-34 dBA

Construction

- Carbon steel construction is standard however other materials such as stainless steel and aluminized steel are available
- Painted with high temperature black paint
- Dual inlets as well as other inlet and outlet configurations are available
- Standard connections are ANSI flanges
- Smaller and larger sizes are available upon request

Model	A	B	D	F (min)	G	WT
AC2-04-0001	4	14	50	5	11	110
AC2-05-0001	5	16	57	6	12	130
AC2-06-0001	6	18	63	7	13	180
AC2-08-0001	8	24	71	9	16	290
AC2-10-0001	10	26	96	11	17	370
AC2-12-0001	12	30	97	13	19	680
AC2-14-0001	14	36	112	15	22	880
AC2-16-0001	16	42	124	17	25	1200
AC2-18-0001	18	48	139	18	28	1450
AC2-20-0001	20	48	150	19	28	1750

Representative Attenuation Curve, AC2 Series

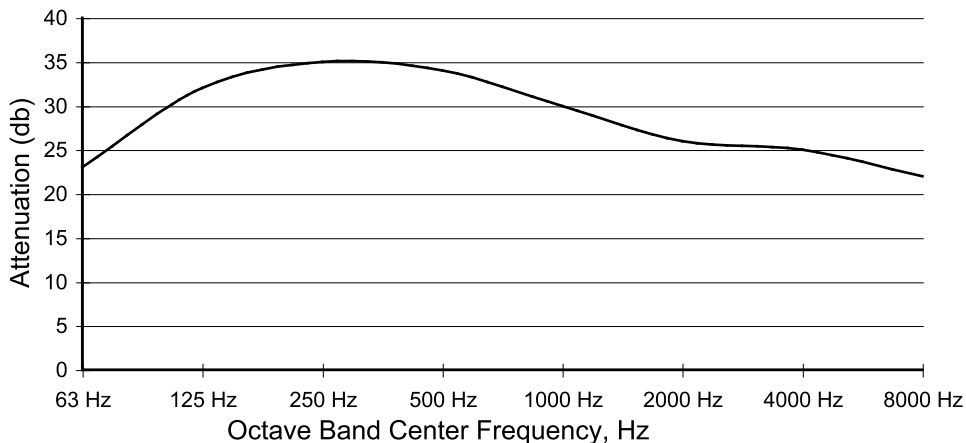

Customize your exhaust system to meet your application needs!

We will work with you to design the silencer and exhaust components that will save product cost and installation time.

BMEA-102 (10/08)

BelMar Industries

Ph: 952-486-8588

Fax: 952-486-8289

www.belmar-ind.com